

JOIN OUR
COMMUNITY!



IXIO-DP1

OPENING & SAFETY SENSOR
FOR AUTOMATIC SLIDING DOORS

(according to EN 16005 and DIN 18650)

User's Guide for software version 0600 and higher
(refer to tracking label on product)




Download the BEA DECODER app
for a quick overview of settings



ARTEK
INSIDE

DESCRIPTION

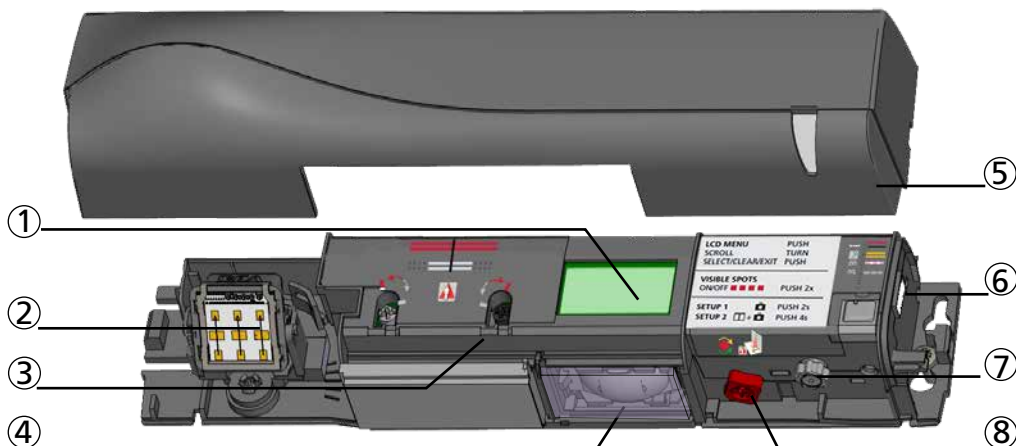

- | | |
|--------------------------------|-------------------------------------|
| 1. LCD | 6. main connector |
| 2. radar antenna | 7. main adjustment knob |
| 3. IR-curtain width adjustment | 8. IR-curtain angle adjustment knob |
| 4. IR-lenses | |
| 5. cover | |

ACCESSORIES




BA: Bracket accessory




CA: Ceiling accessory



RA: Rain accessory






CDA: Curved door accessory




9 V battery

HOW TO USE THE LCD?




DISPLAY DURING NORMAL FUNCTIONING




FACTORY VALUE VS. SAVED VALUE






NAVIGATING IN MENUS

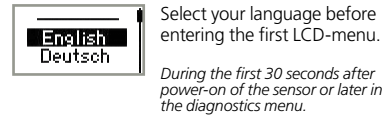


CHANGING A VALUE

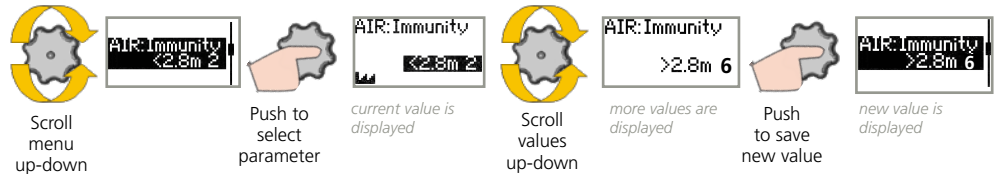


CHANGING A ZIP CODE




VALUE CHECK WITH REMOTE CONTROL



1 MOUNTING & WIRING

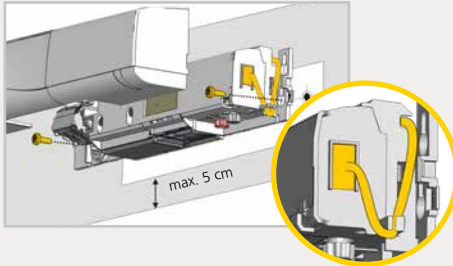

Fixation is compatible with the ACTIV8. Mount the sensor securely.

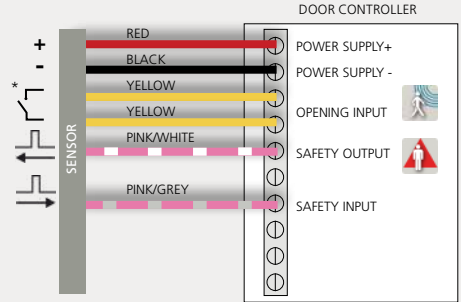


* Depending on OUTPUT CONFIGURATION settings

⚠ Do not invert polarity.



2 RADAR OPENING IMPULSE FIELD

ANGLE

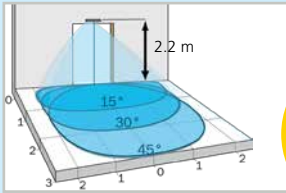


from 15° to 45°, default 30°

field size: 9
immunity: 2




from -15° to 15°, default 0°

field size: 9
immunity: 2




WIDTH




WIDE : 4 m x 2 m

field size: 9
immunity: 2



NARROW : 2 m x 2.5 m


field size: 9
immunity: 2




The size of the detection field varies according to the mounting height of the sensor.

3 INFRARED SAFETY FIELD


ANGLE



Activate the visible* spots to verify the position of the IR-curtain.




If necessary, adjust the IR-curtain angle (from -7° to 4° , default 0°).

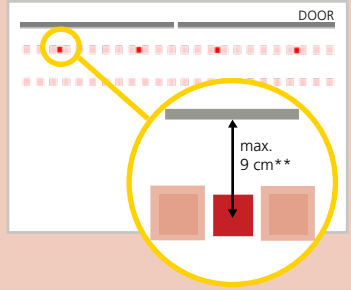


* Visibility depends on external conditions. When spots are not visible, use the Spotfinder to locate the curtains.
 ** The distance between the inner curtain of the inside door sensor and the inner curtain of the outside door sensor should always be smaller than 20 cm. The distance to the door leaf depends therefore on the thickness of the door leaf.

WIDTH

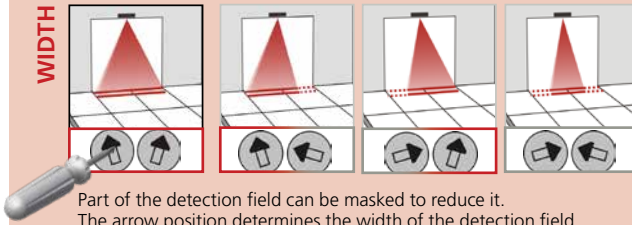


Part of the detection field can be masked to reduce it. The arrow position determines the width of the detection field.



Additional adjustments are possible by LCD or remote control (see p. 5)

Always verify the actual detection field width with a piece of paper and not the Spotfinder, which detects the whole emitted field.

Mounting height	Detection width
2.00 m	2.00 m
2.20 m	2.20 m
2.50 m	2.50 m
3.00 m	d max
3.50 m	d max

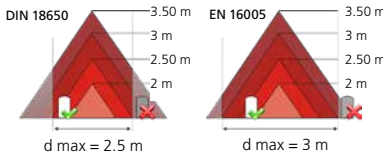

The size of the detection field varies according to the mounting height and the settings of the sensor. The full door width must be covered.


4 SETTINGS

Choose one of the following presettings or adjust the sensor manually (see p.5):

STANDARD: standard in- and outdoor installations

CRITICAL ENVIRONMENT: critical installations due to surroundings or weather

SHOPPING STREET: installations in narrow streets with pedestrian traffic



5 SETUP

STEP OUT OF THE INFRARED FIELD!

SETUP 1 (QUICK)

reference picture



SETUP 2 (ASSISTED)

test of full door cycle + reference picture



TEST THE GOOD FUNCTIONING OF THE INSTALLATION BEFORE LEAVING THE PREMISES!

OVERVIEW OF SETTINGS

BASIC



Back
More

PRESETTINGS

	0	1	2	3	4	5	6	7	8	9	+	-
		standard	critical env.	shopping street					factory values for radar immunity, IR immunity, IR number and redirection increased immunities, 1 curtain increased immunities, redirection = motion and presence			

RAD: FIELD SIZE

small	>	>	>	>	>	>		>	large			
-------	---	---	---	---	---	---	--	---	-------	--	--	--

RAD: SHAPE

									wide	narrow		
--	--	--	--	--	--	--	--	--	------	--------	--	--

IR: IMMUNITY

		↑ < 2.8 m				↑ ≥ 2.8 m		For conformity to EN 16005 or DIN 18650 at a mounting height of 2.8m or more, use values 6 and 7.				
	low	normal	high	higher	highest	normal	high					

IR: FREQUENCY

A	B	Sensors mounted close to each other should have a different frequency.									
---	---	--	--	--	--	--	--	--	--	--	--

More
Back

ADVANCED



Back
More

factory value excludes conformity of the door system according to EN 16005 / DIN 18650. IR Immunity on values 4 or 5 is incompatible with IR presence time on value 0

RAD: IMMUNITY

	low		>	>	>	>	>	>	high			
--	-----	--	---	---	---	---	---	---	------	--	--	--

RAD: DIRECTION

radar off	bi	uni	uni PRM	uni AWAY	bi shop	uni shop	PRM shop	PRM: for persons with reduced mobility AWAY: unidirectional motion away from sensor auto: automatic adaptation of field size (small shops)				
-----------	----	-----	---------	----------	---------	----------	----------	--	--	--	--	--

RAD: HOLDTIME

0.5 s	1 s	2 s	3 s	4 s	5 s	6 s	7 s	8 s	9 s			
-------	-----	-----	-----	-----	-----	-----	-----	-----	-----	--	--	--

RAD: OUTPUT

NO	NC	NC	NO	NO: normally open NC: normally closed					Inv.freq.: frequency in detection (2.5 Hz)	Inv.freq **		
----	----	----	----	--	--	--	--	--	--	-------------	--	--

IR: WIDTH

Always additionally adjust the arrow position on the sensor with a screwdriver.

IR: NUMBER

service mode	1	2	service mode = no IR detection during 15 minutes (maintenance). This value excludes conformity of the door system to EN 16005 and DIN 18650.									
--------------	---	---	--	--	--	--	--	--	--	--	--	--

IR: PRESENCE TIME

motion	15 s	30 s	1 min	2 min	5 min	10 min	20 min	60 min	infinite	min. value for DIN18650: 1 min min. value for EN16005: 30 s		
--------	------	------	-------	-------	-------	--------	--------	--------	----------	--	--	--

IR: OUTPUT

	pulse											
--	-------	--	--	--	--	--	--	--	--	--	--	--

PULSE INPUT

negative	positive											
----------	----------	--	--	--	--	--	--	--	--	--	--	--

REDIRECTION

motion	motion or presence	motion and presence	opening output is active in case of:				0	motion detection 1 motion or presence detection 2 motion and presence detection				
--------	--------------------	---------------------	--------------------------------------	--	--	--	---	---	--	--	--	--

FACTORY RESET

									full reset	partial reset	partial: outputs are not reset	
--	--	--	--	--	--	--	--	--	------------	---------------	--------------------------------	--

More
Back

DIAGNOSTICS



ZIP CODE

all parameter settings in zipped format (see application note on ZIP CODE)

ID

unique ID-number

ERROR LOG

last 10 errors + day indication

IR: SPOTVIEW

view of spot(s) that trigger detection

IR: C1 ENERG

signal amplitude received on curtain 1

IR: C2 ENERG

signal amplitude received on curtain 2

POWERSUPPLY

supply voltage at power connector

OPERATINGTIME

power duration since first startup

RESET LOG

delete all saved errors

PASSWORD

LCD and remote control password (0000= no password)

LANGUAGE







language of LCD-menu

ADMIN


enter code to access admin mode

** Only accessible via LCD

TROUBLESHOOTING

E1	 ORANGE LED flashes 1 x.	The sensor signals an internal fault.	<ol style="list-style-type: none"> 1 Replace sensor.
E2	 ORANGE LED flashes 2 x.	The power supply is too low or too high.	<ol style="list-style-type: none"> 1 Check power supply (in the diagnostics menu of the LCD). 2 Check wiring.
E4	 ORANGE LED flashes 4 x.	The sensor receives not enough IR-energy.	<ol style="list-style-type: none"> 1 Decrease the angle of the IR-curtains. 2 Increase the IR-immunity filter (values ≥ 2.8 m). 3 Deactivate 1 curtain.
E5	 ORANGE LED flashes 5 x.	The sensor receives too much IR-energy.	<ol style="list-style-type: none"> 1 Slightly increase the angle of the IR-curtains.
E8	 ORANGE LED flashes 8 x.	IR power emitter is faulty.	<ol style="list-style-type: none"> 1 Replace sensor.
	 ORANGE LED is on.	The sensor encounters a memory problem.	<ol style="list-style-type: none"> 1 Cut and restore power supply. 2 If orange LED lights up again, replace sensor.
	 RED LED flashes quickly after an assisted setup.	The sensor sees the door during the assisted setup.	<ol style="list-style-type: none"> 1 Move the IR-curtains away from the door. 2 Install the sensor as close to the door as possible. If needed, use a bracket accessory. 3 Launch a new assisted setup.
	 RED LED lights up sporadically.	The sensor vibrates.	<ol style="list-style-type: none"> 1 Check if the sensor is fastened firmly. 2 Check position of cable and cover.
		The sensor sees the door.	<ol style="list-style-type: none"> 1 Launch an assisted setup and adjust the IR angle.
		The sensor is disturbed by external conditions.	<ol style="list-style-type: none"> 1 Increase the IR-immunity filter to value 3. 2 Select presetting 2 or 3.
	 GREEN LED lights up sporadically.	The sensor is disturbed by rain and/or leaves.	<ol style="list-style-type: none"> 1 Select presetting 2 or 3. 2 Increase radar-immunity filter.
		Ghosting created by door movement.	<ol style="list-style-type: none"> 1 Change radar field angle.
		The sensor vibrates.	<ol style="list-style-type: none"> 1 Check if the sensor and door cover is fastened firmly. 2 Check position of cable and cover.
		The sensor sees the door or other moving objects.	<ol style="list-style-type: none"> 1 Remove the objects if possible. 2 Change radar field size or angle.
	 The LED and the LCD-display are off.		<ol style="list-style-type: none"> 1 Check wiring.
	The reaction of the door does not correspond to the LED-signal.		<ol style="list-style-type: none"> 1 Check output configuration setting. 2 Check wiring.
	The LCD or remote control does not react.	The sensor is protected by a password.	<ol style="list-style-type: none"> 1 Enter the right password. If you forgot the code, cut and restore the power supply to access the sensor without entering a password during 1 minute.


LED-SIGNAL




Motion detection




Presence detection




LED flashes



LED flashes
x times



LED flashes
red-green



LED flashes
quickly



LED is off

INSTALLATION



The sensor should be fixed firmly to avoid extreme vibrations.



Do not cover the sensor.



Avoid moving objects and light sources in the detection field.




Avoid highly reflective objects in the infrared field.

MAINTENANCE



It is recommended to clean the optical parts at least once a year or more if required due to environmental conditions.




For complete cleaning, remove both windows by inserting a screwdriver into the notches located between the two windows.




Do not use aggressive products to clean the optical parts.

SAFETY




The door control unit and the door cover profile must be correctly earthed.



Only trained and qualified personnel may install and setup the sensor.



Always test the good functioning of the installation before leaving the premises.



The warranty is invalid if unauthorized repairs are made or attempted by unauthorized personnel.



- The sensor cannot be used for purposes other than its intended use.
- The manufacturer of the door system incorporating the sensor is responsible for compliance of the system to applicable national and international regulations and safety standards.
- The installer must read, understand and follow the instructions given in this manual. Improper installation can result in improper sensor operation.
- The manufacturer of the sensor cannot be held responsible for injury or damage resulting from incorrect use, installation or inappropriate adjustment of the sensor.

TECHNICAL SPECIFICATIONS

Supply voltage*:	12 V - 30 V DC +/-10%
Power consumption:	< 2.5 W
Mounting height:	2 m to 3.5 m
Temperature range:	-25°C to +55°C; 0-95% relative humidity, non condensing
Degree of protection:	IP54 (IEC/EN 60529)
Noise:	< 70 dB



Detection mode:	Motion Min. detection speed: 5 cm/s	Presence Typical response time: < 200 ms (max. 500 ms)
Technology:	Microwave doppler radar Transmitter frequency: 24.150 GHz Transmitter radiated power: < 20 dBm EIRP Transmitter power density: < 5 mW/cm ²	Active infrared with background analysis Spot: 5 cm x 5 cm (typ) Number of spots: max. 24 per curtain Number of curtains: 2
Output*:	Solid-state-relay (potential and polarity free) Max. contact current: 100 mA Max. contact voltage: 42 V DC / 30 V AC In inverted frequency mode: pulsed signal in detection (f = 2.5 Hz)	-Input: Pulse polarity: positive or negative (adjustable) Impedance: - Positive pulse: 2 K to ground - Negative pulse: 470 R to + sensor power supply Pulse voltage: 6 V to 30 V Pulse duration: 4 µs to 500 µs Duty cycle: max. 50% -Output: Pulse polarity: negative Level: - Standby: Pulse from V to ground - Detection: V Supply Topology: op-collector with 4.7 K to 3.3 V Max. sink current: 25 mA with external 1 K to 24 V
Safety Standards:		EN ISO 13849-1 PL «C» CAT. 2 (under the condition that the door control system monitors the sensor at least once per door cycle) EN 16005 (protective devices) DIN 18650-1 (protective devices) EN 12978

Specifications are subject to changes without prior notice.
All values measured in specific conditions and with a temperature of 25°C.

* External electrical sources must be within specified voltages, max 15W and ensure double insulation from primary voltages.



BEA SA | UEGE Science Park | Allée des Noisetiers, 5 - 4031 ANGLEUR [BELGIUM] | T +32 4 361 65 65 | F +32 4 361 28 58 | info-eu@beasensors.com | www.beasensors.com



BEA hereby declares that this product is in conformity with the European directives :
2014/53/EU (RED) - 2006/42/EC (Machinery) - 2011/65/EU (RoHS).
EC-type examination certificate from TÜV NORD CERT : 44 205 13089612.
The complete declaration of conformity is available on our website.



This product should be disposed of separately from unsorted municipal waste.