

JOIN OUR
COMMUNITY!



IXIO-DT1

OPENING & SAFETY SENSOR
FOR AUTOMATIC SLIDING DOORS

(according to EN 16005 and DIN 18650)

User's Guide for software version 0600 and higher
(refer to tracking label on product)




Download the BEA DECODER app
for a quick overview of settings




ARTEK
INSIDE

DESCRIPTION

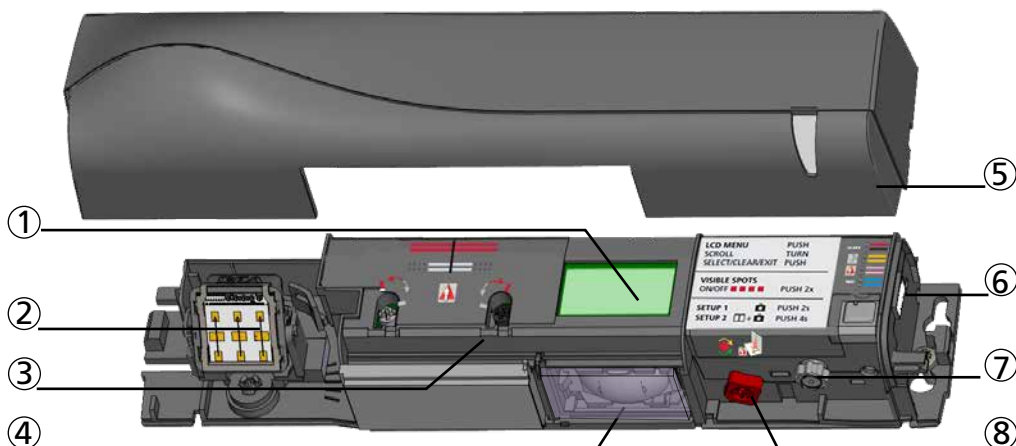

- | | | | |
|----|-----------------------------|----|----------------------------------|
| 1. | LCD | 6. | main connector |
| 2. | radar antenna | 7. | main adjustment knob |
| 3. | IR-curtain width adjustment | 8. | IR-curtain angle adjustment knob |
| 4. | IR-lenses | | |
| 5. | cover | | |

ACCESSORIES




BA: Bracket accessory




CA: Ceiling accessory



RA: Rain accessory



CDA: Curved door accessory






9V battery




Smart Daisy Chain hub

HOW TO USE THE LCD?



DISPLAY DURING NORMAL FUNCTIONING

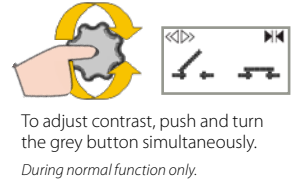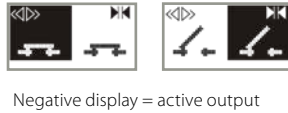


FACTORY VALUE VS. SAVED VALUE




NAVIGATING IN MENUS




CHANGING A VALUE

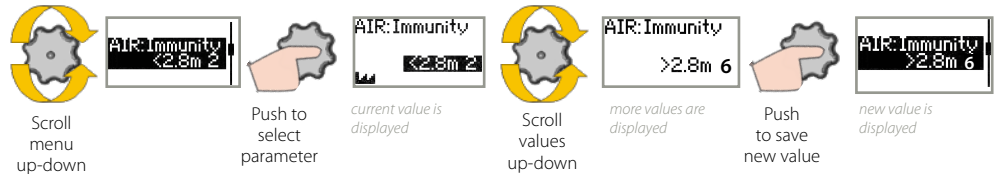


CHANGING A ZIP CODE

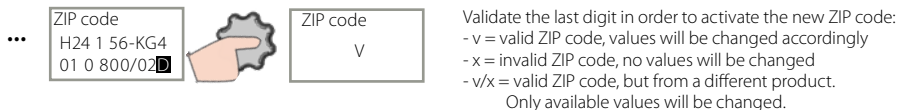


VALUE CHECK WITH REMOTE CONTROL



1 MOUNTING & WIRING

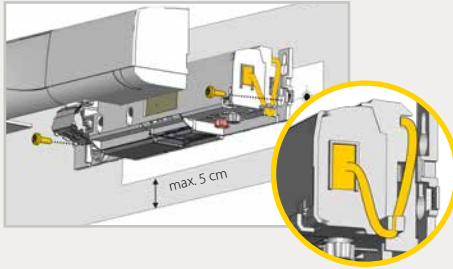


Fixation is compatible with the ACTIV8. Mount the sensor securely.

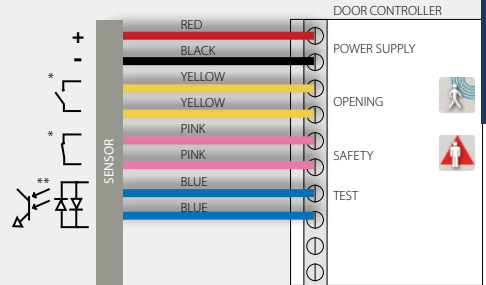



* Depending on OUTPUT CONFIGURATION settings
 ** For compliance with EN 16005 and DIN 18650, connection to door controller test output is required.

2 RADAR OPENING IMPULSE FIELD


ANGLE




from 15° to 45°, default 30°




from -15° to 15°, default 0°





WIDTH



WIDE : 4 m x 2 m
 field size: 9
 immunity: 2




NARROW : 2 m x 2.5 m
 field size: 9
 immunity: 2




The size of the detection field varies according to the mounting height of the sensor.

3 INFRARED SAFETY FIELD


ANGLE



Activate the visible* spots to verify the position of the IR-curtain.




If necessary, adjust the IR-curtain angle (from -7° to 4°, default 0°).

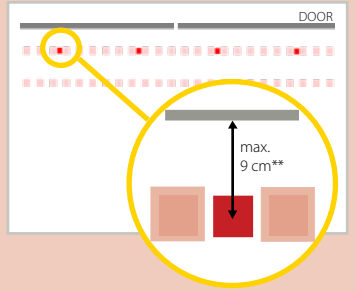


* Visibility depends on external conditions. When spots are not visible, use the Spotfinder to locate the curtains.
 ** The distance between the inner curtain of the inside door sensor and the inner curtain of the outside door sensor should always be smaller than 20 cm. The distance to the door leaf depends therefore on the thickness of the door leaf.

WIDTH

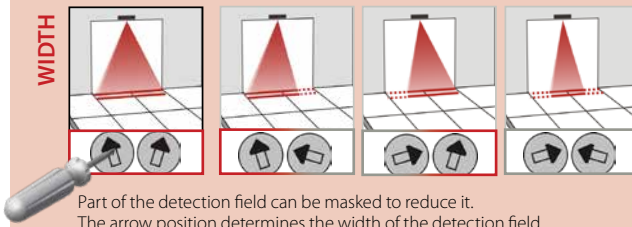



Part of the detection field can be masked to reduce it. The arrow position determines the width of the detection field.



Always verify the actual detection field width with a piece of paper and not the Spotfinder, which detects the whole emitted field.

Additional adjustments are possible by LCD or remote control (see p. 5)

Mounting height	Detection width
2.00 m	2.00 m
2.20 m	2.20 m
2.50 m	2.50 m
3.00 m	d max
3.50 m	d max



The size of the detection field varies according to the mounting height and the settings of the sensor. The full door width must be covered.

4 SETTINGS

Choose one of the following presets or adjust the sensor manually (see p.5):

STANDARD: standard in- and outdoor installations

CRITICAL ENVIRONMENT: critical installations due to surroundings or weather

SHOPPING STREET: installations in narrow streets with pedestrian traffic



Presettings: Standard 1

Presettings: Critical env 2

Presettings: Shopping str 3

5 SETUP

STEP OUT OF THE INFRARED FIELD!

SETUP 1 (QUICK)

reference picture



2 s

SETUP 2 (ASSISTED)

test of full door cycle + reference picture



4 s



TEST THE GOOD FUNCTIONING OF THE INSTALLATION BEFORE LEAVING THE PREMISES!

OVERVIEW OF SETTINGS

BASIC



Back

More

PRESETTINGS

RAD: FIELD SIZE

RAD: SHAPE

IR: IMMUNITY

IR: FREQUENCY

More

Back

ADVANCED



Back

More

RAD: IMMUNITY

RAD: DIRECTION

RAD: HOLD TIME

RAD: OUTPUT

IR: WIDTH

IR: NUMBER

IR: PRESENCE TIME

IR: OUTPUT

REDIRECTION

SMART DAISY CHAIN*

FACTORY RESET

More

Back

DIAGNOSTICS



ZIP CODE

ID #

ERROR LOG

IR: SPOTVIEW

IR: C1: ENERG

IR: C2: ENERG

	0	1	2	3	4	5	6	7	8	9	+	-		
PRESETTINGS		standard	critical env.	shopping street	factory values for radar immunity, IR immunity, IR number and redirection									
		increased immunities, 1 curtain		increased immunities, redirection = motion and presence										
RAD: FIELD SIZE	small	>	>	>	>	>	>		>	large				
RAD: SHAPE										wide	narrow			
IR: IMMUNITY		low	normal	high	higher	highest	normal	high	For conformity to EN 16005 or DIN 18650 at a mounting height of 2.8 m or more, use values 6 and 7.					
IR: FREQUENCY		A	B	Sensors mounted close to each other should have a different frequency.										
More														
Back														
ADVANCED														
Back														
More														
		factory value	excludes conformity of the door system according to EN 16005 / DIN 18650. IR Immunity on values 4 or 5 is incompatible with IR presence time on value 0											
RAD: IMMUNITY		low		>	>	>	>	>	>	high				
RAD: DIRECTION	radar off	bi	uni	uni PRM	uni AWAY	bi shop	uni shop	PRM shop	PRM: for persons with reduced mobility AWAY: unidirectional motion away from sensor shop: automatic adaptation of field size (small shops)					
RAD: HOLD TIME	0.5 s	1 s	2 s	3 s	4 s	5 s	6 s	7 s	8 s	9 s				
RAD: OUTPUT		NO NC	NC NO	NC NC	NO NO	NO: normally open NC: normally closed			Inv.freq.: frequency in detection (2.5 Hz)		Inv.freq **			
IR: WIDTH														
												Always additionally adjust the arrow position on the sensor with a screwdriver.		
IR: NUMBER	service mode	1	2	service mode = no IR detection during 15 minutes (maintenance). This value excludes conformity of the door system to EN 16005 and DIN 18650.										
IR: PRESENCE TIME	motion	15 s	30 s	1 min	2 min	5 min	10 min	20 min	60 min	infinite	min. value for DIN 18650: 1 min min. value for EN 16005: 30 s			
IR: OUTPUT		NO NC	NC NO	NC NC	NO NO							NO: normally open NC: normally closed		
REDIRECTION	motion	motion or presence	motion and presence	opening output is active in case of:				0 motion detection 1 motion or presence detection 2 motion and presence detection						
SMART DAISY CHAIN*	off	1/2	2/2	1/3	2/3	3/3	1/2: 1st sensor in chain of 2; 2/2: 2nd sensor in chain of 2 1/3: 1st in chain of 3; 2/3: 2nd in chain of 3; 3/3: 3rd in chain of 3							
FACTORY RESET									full reset	partial reset	partial: outputs are not reset			

* Setting in combination with an accessory. For more information, see user's guide of accessory

** Only accessible via LCD



all parameter settings in zipped format (see application note on ZIP CODE)

unique ID-number

last 10 errors + day indication













view of spot(s) that trigger detection

signal amplitude received on curtain 1

signal amplitude received on curtain 2

- POWERSUPPLY supply voltage at power connector
- OPERATINGTIME power duration since first startup
- RESET LOG delete all saved errors
- PASSWORD LCD and remote control password (0000= no password)
- LANGUAGE language of LCD-menu
- ADMIN enter code to access admin mode

TROUBLESHOOTING

E1	 ORANGE LED flashes 1 x.	The sensor signals an internal fault.	<ol style="list-style-type: none"> 1 Replace sensor.
E2	 ORANGE LED flashes 2 x.	The power supply is too low or too high.	<ol style="list-style-type: none"> 1 Check power supply (in the diagnostics menu of the LCD). 2 Check wiring.
E3	 ORANGE LED flashes 3 x.	The previous sensor in the daisy chain is faulty	<ol style="list-style-type: none"> 1 Replace previous sensor in the chain
E3		The SDC setting does not match with the real product position	<ol style="list-style-type: none"> 1 Lock the SDC position setting
E4	 ORANGE LED flashes 4 x.	The sensor receives not enough IR-energy.	<ol style="list-style-type: none"> 1 Decrease the angle of the IR-curtains. 2 Increase the IR-immunity filter (values ≥ 2.8 m). 3 Deactivate 1 curtain.
E5	 ORANGE LED flashes 5 x.	The sensor receives too much IR-energy.	<ol style="list-style-type: none"> 1 Slightly increase the angle of the IR-curtains.
E5		The sensor is disturbed by external elements.	<ol style="list-style-type: none"> 1 Eliminate the cause of disturbance (lamps, rain cover, door controller housing properly grounded).
E8	 ORANGE LED flashes 8 x.	IR power emitter is faulty.	<ol style="list-style-type: none"> 1 Replace sensor.
E8	 ORANGE LED is on.	The sensor encounters a memory problem.	<ol style="list-style-type: none"> 1 Cut and restore power supply. 2 If orange LED lights up again, replace sensor.
E8	 RED LED flashes quickly after an assisted setup.	The sensor sees the door during the assisted setup.	<ol style="list-style-type: none"> 1 Move the IR-curtains away from the door. 2 Install the sensor as close to the door as possible. If needed, use a bracket accessory. 3 Launch a new assisted setup.
E8	 RED LED lights up sporadically.	The sensor vibrates.	<ol style="list-style-type: none"> 1 Check if the sensor is fastened firmly. 2 Check position of cable and cover.
E8		The sensor sees the door.	<ol style="list-style-type: none"> 1 Launch an assisted setup and adjust the IR angle.
E8		The sensor is disturbed by external conditions.	<ol style="list-style-type: none"> 1 Increase the IR-immunity filter to value 3. 2 Select presetting 2 or 3.
E8	 GREEN LED lights up sporadically.	The sensor is disturbed by rain and/or leaves.	<ol style="list-style-type: none"> 1 Select presetting 2 or 3. 2 Increase radar-immunity filter.
E8		Ghosting created by door movement.	<ol style="list-style-type: none"> 1 Change radar field angle.
E8		The sensor vibrates.	<ol style="list-style-type: none"> 1 Check if the sensor and door cover is fastened firmly. 2 Check position of cable and cover.
E8		The sensor sees the door or other moving objects.	<ol style="list-style-type: none"> 1 Remove the objects if possible. 2 Change radar field size or angle.
E8	 The LED and the LCD-display are off.		<ol style="list-style-type: none"> 1 Check wiring.
E8	The reaction of the door does not correspond to the LED-signal.		<ol style="list-style-type: none"> 1 Check output configuration setting. 2 Check wiring.
E8	 The LCD or remote control does not react.	The sensor is protected by a password.	<ol style="list-style-type: none"> 1 Enter the right password. If you forgot the code, cut and restore the power supply to access the sensor without entering a password during 1 minute.

LED-SIGNAL



Motion detection



Presence detection



LED flashes



LED flashes x times



LED flashes red-green



LED flashes quickly



LED is off

INSTALLATION



The sensor should be fixed firmly to avoid extreme vibrations.



Do not cover the sensor.



Avoid moving objects and light sources in the detection field.




Avoid highly reflective objects in the infrared field.

MAINTENANCE



It is recommended to clean the sensor at least once a year or more if required due to environmental conditions.




For complete cleaning, remove both windows by inserting a screwdriver into the notches located between the two windows.



Do not use aggressive products to clean the optical parts.

SAFETY




The door control unit and the door cover profile must be correctly earthed.



Only trained and qualified personnel may install and setup the sensor.



Always test the good functioning of the installation before leaving the premises.



The warranty is invalid if unauthorized repairs are made or attempted by unauthorized personnel.



- The sensor cannot be used for purposes other than its intended use.
- The manufacturer of the door system incorporating the sensor is responsible for compliance of the system to applicable national and international regulations and safety standards.
- The installer must read, understand and follow the instructions given in this manual. Improper installation can result in improper sensor operation.
- The manufacturer of the sensor cannot be held responsible for injury or damage resulting from incorrect use, installation or inappropriate adjustment of the sensor.

TECHNICAL SPECIFICATIONS

Supply voltage*:	12 V - 24 V AC +/-10% (50 - 60 Hz) ; 12 V - 30 V DC +/-10%
Power consumption:	< 2.5 W
Mounting height:	2 m to 3.5 m
Temperature range:	-25°C to +55°C; 0-95% relative humidity, non condensing
Degree of protection:	IP54 (IEC/EN 60529)
Noise:	< 70 dB



Detection mode:	Motion Min. detection speed: 5 cm/s	Presence Typical response time: < 200 ms (max. 500 ms)
Technology:	Microwave doppler radar Transmitter frequency: 24.150 GHz Transmitter radiated power: < 20 dBm EIRP Transmitter power density: < 5 mW/cm ²	Active infrared with background analysis Spot: 5 cm x 5 cm (typ) Number of spots: max. 24 per curtain Number of curtains: 2
Output*:	Solid-state-relay (potential and polarity free) Max. contact current: 100 mA Max. contact voltage: 42 V DC / 30 V AC In inverted frequency mode: pulsed signal in detection (f = 2.5 Hz)	Solid-state-relay (potential and polarity free) Max. contact current: 100 mA Max. contact voltage: 42 V DC / 30 V AC Holdtime: 0.3 to 1 s
Test input*:		Sensitivity: Low: < 1 V; High: > 10 V (max. 30 V) Response time on test request: typical: < 5 ms
Safety Standards:		EN ISO 13849-1 PL «C» CAT. 2 (under the condition that the door control system monitors the sensor at least once per door cycle) EN 16005 (protective devices) DIN 18650-1 (protective devices) EN 12978

Specifications are subject to changes without prior notice.
All values measured in specific conditions and with a temperature of 25°C

* External electrical sources must be within specified voltages, max 15W and ensure double insulation from primary voltages.



BEA SA | UEGE Science Park | Allée des Noisetiers, 5 - 4031 ANGLEUR [BELGIUM] | T +32 4 361 65 65 | F +32 4 361 28 58 | info-eu@beasensors.com | www.beasensors.com



BEA hereby declares that this product is in conformity with European directives :
2014/53/EU (RED), 2006/42/EC (Machinery), 2011/65/EU (RoHS).
EC-type examination certificate from TÜV NORD CERT : 44 205 13089612.
The complete declaration of conformity is available on our website.



This product should be disposed of separately from unsorted municipal waste.

