


# EYE-TECH

## COMFORT SENSOR FOR AUTOMATIC SWING AND REVOLVING DOORS

Commercial sheet

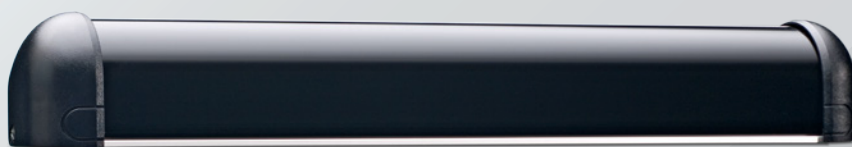

### THE ADDITIONAL PROTECTION

#### DESCRIPTION

The **EYE-TECH** is a presence active infrared sensor operating by distance measuring.


Mounted on the leaves of swing and revolving doors, it offers a basic safety for the users.

#### FEATURES

- Area of 10 cm in front of the leaf 2 m high with a single active infrared spot.
- Possibility to extend the detection area by adding "slave" modules.
- Reliable detection thanks to the "anti-masking" option irrespective of the texture or the colour of the object to be detected.
- Additional safety device for low energy doors used by people with disabilities.



EYE-TECH ■

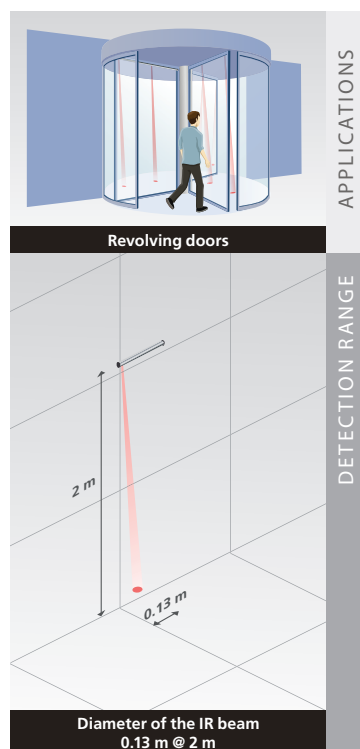

## APPLICATIONS

- Automatic swinging, revolving and low energy doors.

## EASE OF INSTALLATION

- Mechanical adjustment of the detection area.
- "Anti-masking" mode can be selected with DIP-switches.

## TECHNICAL SPECIFICATIONS

<b>Technology</b>	Active Infrared with background suppression
<b>Detection distance</b>	0.7 m to 2.5 m (adjustable by linear movement swivelling cam)
<b>Module inclination angle</b>	0° - 5° - 10° - 15° - 20° - 25°
<b>Diameter of the infrared beam @ 2 m</b>	0.13 m
<b>Detection mode</b>	Presence (and movement)
<b>Detection duration (presence)</b>	Infinite
<b>Response time</b>	< 50 ms
<b>Special inputs</b>	System inhibition
<b>Supply voltage</b> Relay output option Transistor output option	12 to 24 V AC/DC ±10% 12 to 30 V DC ±10%
<b>Mains frequency</b>	50 to 60 Hz
<b>Power consumption</b> Master ON Slave ON Master OFF Slave OFF	60 mA maximum 40 mA maximum 30 mA maximum 30 mA maximum
<b>Standard output</b> Relay contact ratings (max voltage) Relay contact ratings (max current) Max. switching power	Switch-over relay (voltage free contact) 60 V DC / 125 V AC 1 A (resistive) 30 W (DC) / 60 VA (AC)
<b>Optional output</b> max. voltage max. current	Open collector transistor 30 V DC 100 mA (protection against short-circuits)
<b>Output holding time</b>	0.1 s to 4.5 s (adjustable)
<b>Temperature range</b>	-20°C to +50°C
<b>Dimensions</b>	340 - 700 - 900 mm (L) × 43.5 mm (H) × 47.5 mm (D)
<b>Material</b>	Aluminium, ABS and Plexiglas
<b>Colour of the box</b>	Natural aluminium (black or chrome optional) black front side
<b>Connection sheath</b>	0.5 m
<b>Norm conformity</b>	EMC 2004/108/EC; MD 2006/42/EC; EN 12978

*Specifications are subject to change without prior notice.*

**DISCLAIMER** This document as well as all other enclosed documents (quotation / specification / other) are provided «as is» without warranties of any kind, either expressed or implied, including but not limited to the implied warranties of merchantability, fitness for a particular purpose, or non-infringement. / Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. / BEA has the right without liability to change descriptions and specifications at any time. / Prices, shipping and availability are subject to change without prior notice.

