

MILAN

PRESENCE SENSOR FOR INDUSTRIAL DOORS


Commercial sheet



THE WATCHER OF RAPID DOORS

DESCRIPTION


The **MILAN** is an active infrared sensor working on the principle of the ground reflectivity analysis. Its mission is to increase the protection of the door by avoiding every collision with vehicles standing close to the door area. Moreover, the MILAN adjustment allows to define small and accurate detection areas in front of the door.

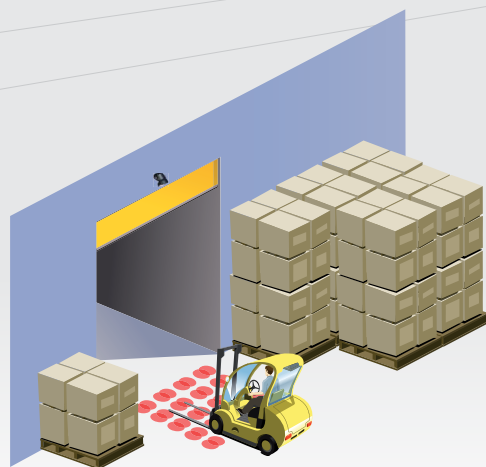

PERFORMANCE

- 40 active infrared spotlights covering 3 m x 3 m* in front of the door.
- Possibility to adjust the detection area and the minimal size of the target.
- Two outputs available to run presence and motion separately.
- Improvement of the door protection and reduction of collision risks.
- Increased protection of vehicles and pedestrians.

* at an installation height of 5 m with an angle of 20°

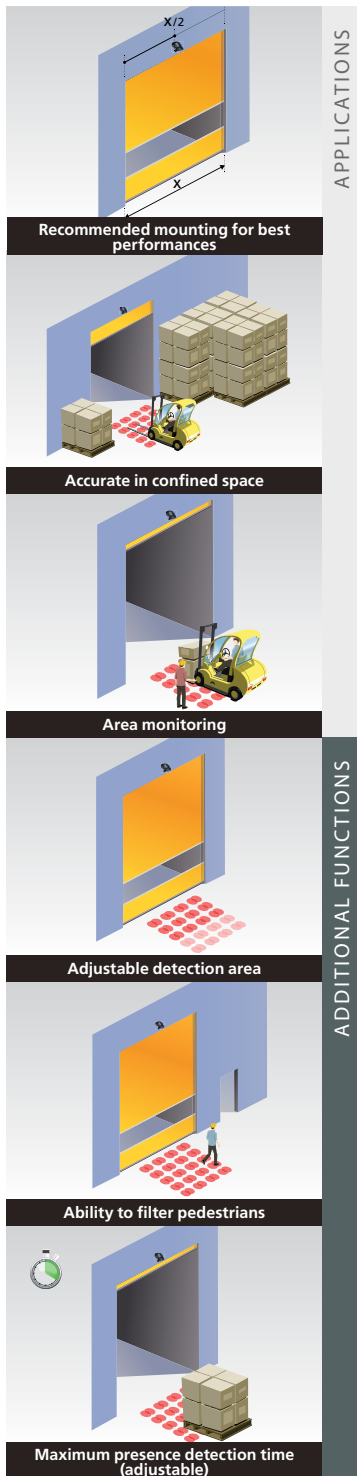

APPLICATIONS

ADDITIONAL FUNCTIONS

APPLICATIONS

- Presence detection in front of the door to increase its protection.
- Accurate opening in confined rooms.

DESIGNED FOR INDUSTRIAL ENVIRONMENTS

- Rugged housing designed for industrial applications.
- Installation till 6 m high depending on size and nature of the target.
- Degree of protection: IP65.

EASE OF INSTALLATION

- Simple installation (plug and play).
- User-friendly adjustment with remote control and spotfinder.
- Immunity against door vibrations and interferences.

TECHNICAL SPECIFICATIONS

Technology	infrared
Wavelength	875 nm
Radiated power density	< 250 mW/m ²
Detection mode	Motion & presence
Detection field	3 m x 3 m* (5 lines x 8 spots)
Angle	15° - 45°
Output	Relay (free of potential change-over contact)
Max. contact voltage	42 V AC/DC
Max. contact current	1A (resistive)
Max. switching power	30W (DC) / 60 VA (AC)
Output hold time	0.5 s
Reaction time	250 ms
Min. target speed	5 cm/s to activate a detection
LED-signal	Green Red
Mains frequency	50 to 60 Hz
Supply voltage	12V to 24V AC ±10% 12V to 24V DC +30% / -10%
Max power consumption	< 2 W/VA
Mounting height	2,5 m - 6 m **
Dimensions	127 mm (P) x 102 mm (L) x 96 mm (H)
Housing material	ABS/Polycarbonate
Colour	Black and smoked violet
Temperature range	-30°C à +60°C
Protection degree	IP65
Humidity	0-95 % non-condensing
Norm conformity	EMC 2014/30/EU; ROHS 2 2011/65/EU

*Specifications are subject to change without prior notice
* at a mounting height of 5 m
** depending on size and nature of the target*

DISCLAIMER This document as well as all other enclosed documents (quotation / specification / other) are provided «as is» without warranties of any kind, either expressed or implied, including but not limited to the implied warranties of merchantability, fitness for a particular purpose, or non-infringement. / Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. / BEA has the right without liability to change descriptions and specifications at any time. / Prices, shipping and availability are subject to change without prior notice.



www.bea-sensors.com

MILAN PRESENCE SENSOR FOR INDUSTRIAL DOORS

A HALMA COMPANY



BEA s.a. / LIEGE Science Park / Allée des Noisetiers 5 / 4031 Angleur • BELGIUM
T +32 (0) 4 361 65 65 / F +32 (0) 4 361 28 58 / E info@bea.be

