




LZR®-WIDESCAN

Opening, presence & safety sensor
for industrial doors



APPLICATIONS



TECHNOLOGY

Laser


DESCRIPTION

The **LZR®-WIDESCAN** sensor uses laser technology, based on analysis of time of flight. By generating 7 tilted laser curtains, the sensor creates a volumetric area in front of the door. One device offers 3 main functions: opening the door, area surveillance in front of the door and additional people protection in the door threshold area. Moreover, it not only optimizes traffic flow and energy savings, but also increases door protection and user comfort. The sensor is easy to install thanks to an intuitive app.

VIDEO



Discover the product video on our
youtube channel **BEA Sensors Europe**
<https://bit.ly/2zNZZYH>

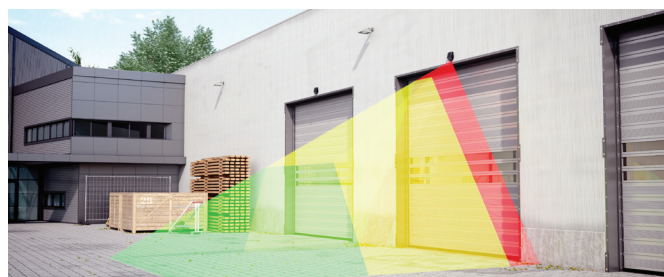


Volumetric coverage

Thanks to the precise distance measurement of the laser technology, the sensor generates a 3D detection field, which enables the exact calculation of object dimensions, speed and direction.



Door protection

The **LZR®-WIDESCAN** becomes your doorkeeper and protects your investment. It detects approaching or parked vehicles accurately in order to prevent any contact with the door.

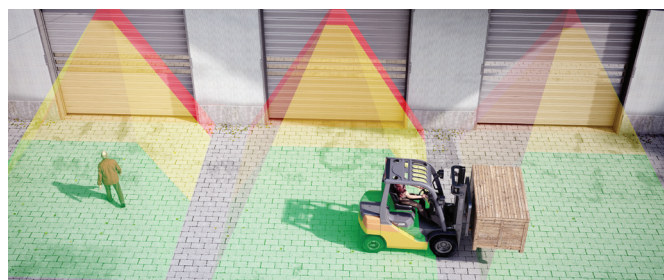

Energy savings

The object profiling enables filtering out parallel traffic, ignoring pedestrians and optimizing the opening height of the door if desired. Furthermore, the virtual pull cord can be used for intentional activation. Therefore the door only opens when needed.




Independent of floor and environment

The laser technology offers a high level of independence when confronted with weather conditions such as rain, snow, fog, etc.


APPLICATIONS



Standard with pedestrian door

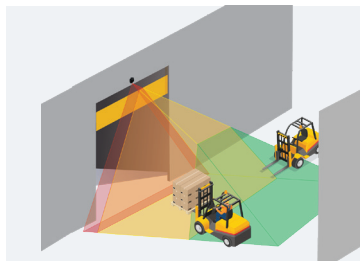


Corridor

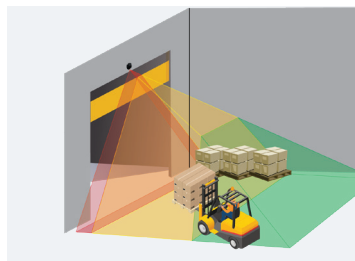


Corner

ACCESSORIES

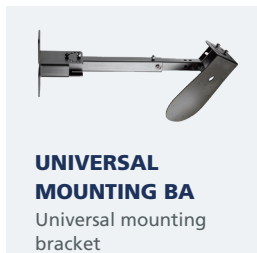

UNIVERSAL MOUNTING BA
Universal mounting bracket

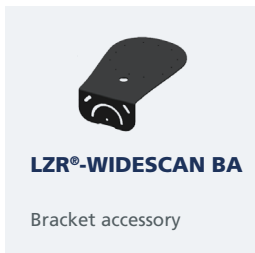

LZR®-WIDESCAN BA
Bracket accessory




LZR®-WIDESCAN RETROFIT ADAPTER
Retrofit accessory

INSTALLATION


- Intuitive configuration via app
- Two visible spots help aligning the detection fields
- Flexible detection fields that can be adapted to any environment
- Plug & play installation without road works

APP

Download the LZR Widescan app on the Apple App Store and Google Play Store.

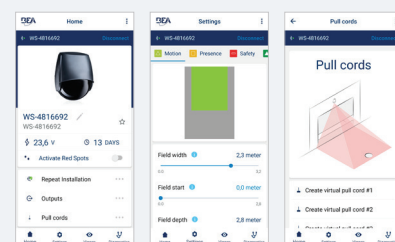

TECHNICAL SPECIFICATIONS

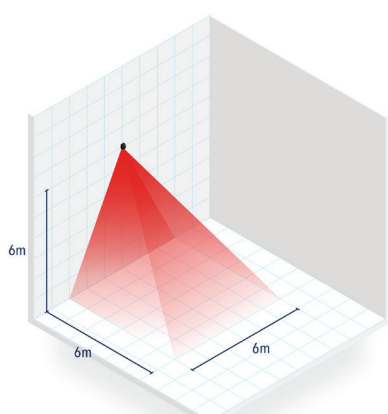

Technology	LASER scanner, time-of-flight measurement
Max. detection field	Width: 1 x mounting height; Depth: 1 x mounting height (adjustable and depending on user settings)
Typ. mounting height	2 m to 10 m (max. 6 m for optimal safety detection)
Emission characteristics	IR LASER: Wavelength 905 nm; max. output pulse power 25 W; Class 1 Visible LASER: Wavelength 650 nm; max. output CW power 3 mW; Class 3R
Supply voltage	12 V - 24 V AC +/-10% ; 12 V - 30 V DC +/-10% @ sensor terminal
Power consumption	heating off: < 2.5 W; heating auto: typ. < 10 W, max. 15 W
Response time	Typ. 80 ms; max. 800 ms
Outputs	2 solid-state relays (galvanic isolation - polarity free) 30 V DC (max. switching voltage) - 100 mA (max. switching current) - in switching mode: NO/NC - in frequency mode: pulsed signal (f= 100 Hz +/- 10%) 1 electro-mechanical relay (galvanic isolation - polarity free) 42 V AC (max. switching voltage) - 500 mA (max. switching current)
Test input	30 V DC (max. switching voltage) - low < 1 V, high > 10 V (voltage threshold)
Dimensions	200 mm (H) x 150 mm (W) x 100 mm (D) (approx.)
Material / Colour	PC/ASA / Black
Protection degree	IP65
Temperature range	-30 °C to +60 °C
Vibrations	< 2 G
Conformity	EN 61000-6-2; EN 61000-6-3; EN 60950-1; EN 60825-1; EN 50581

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.

WWW.BEASENSORS.COM



BEA s.a. / LIEGE Science Park / Allée des Noisetiers 5 / 4031 Angleur • BELGIUM
T +32 (0)4 361 65 65 / F +32 (0)4 361 28 58 / E info-eu@beasensors.com

A Halma company