


# EAGLE ONE

## UNIDIRECTIONAL OPENING SENSOR FOR AUTOMATIC DOORS\*



User's Guide for product version 0600 and higher  
See product label for serial number

### DESCRIPTION

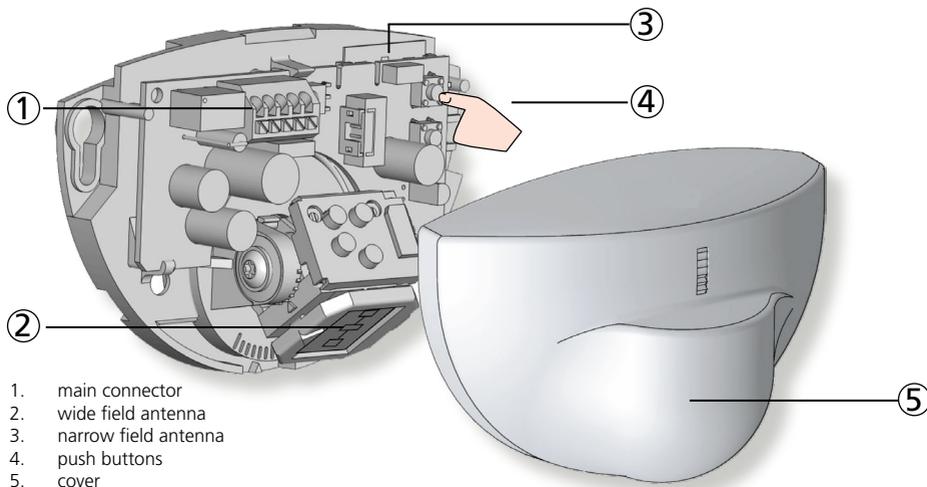

1. main connector
2. wide field antenna
3. narrow field antenna
4. push buttons
5. cover


### TECHNICAL SPECIFICATIONS

Technology:	microwave and microprocessor
Transmitter frequency:	24.150 GHz
Transmitter radiated power:	< 20 dBm EIRP
Transmitter power density:	< 5 mW/cm <sup>2</sup>
Detection mode:	motion
Min. detection speed:	5 cm/s
Supply voltage:	12V to 24V AC $\pm$ 10%; 12V to 24V DC +30% / -10%
Mains frequency:	50 to 60 Hz
Max power consumption:	< 2 W
Output:	relay (free of potential change-over contact)
Max. contact voltage:	42V AC/DC
Max. contact current:	1A (resistive)
Max. switching power:	30W (DC) / 60VA (AC)
Mounting height:	from 1.8 m to 4 m
Degree of protection:	IP54
Temperature range:	from -20 °C to + 55 °C
Dimensions:	120 mm (L) x 80 mm (H) x 50 mm (W)
Tilt angles:	0° to 90° vertical; -30° to +30° lateral
Material:	ABS
Weight:	215 g
Cable length:	2.5 m
Conformity:	RED 2014/53/EU , RoHS 2 2011/65/EU


Specifications are subject to changes without prior notice.  
Measured in specific conditions.

\* Other use of the device outside of the permitted purpose can not be guaranteed by the manufacturer.

# 1 OPENING THE SENSOR

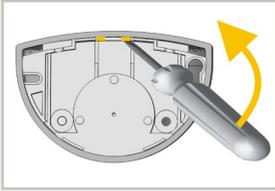


Before fixing

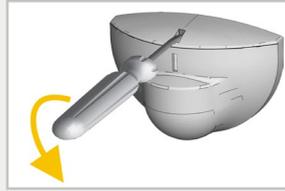

After fixing

# 2 MOUNTING & WIRING


## TIPS



Do not touch electrical parts.



Avoid vibrations.




Do not cover the sensor.




Avoid proximity to neon lamps or moving objects.


## APPLICATIONS

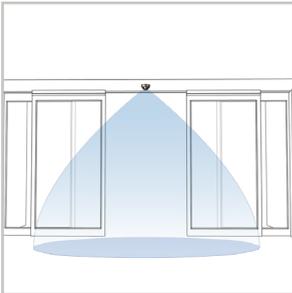


Wall mounting above sliding or revolving door

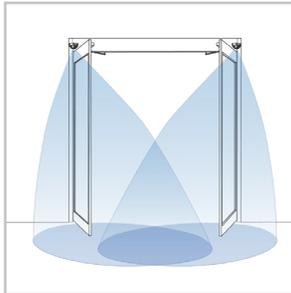


Mounting on door axis (swing doors)

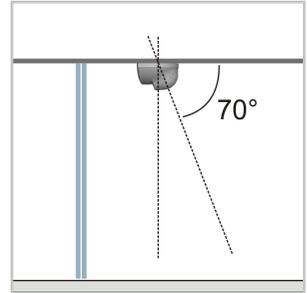


Ceiling mounting in front of door (sliding, revolving or swing doors)

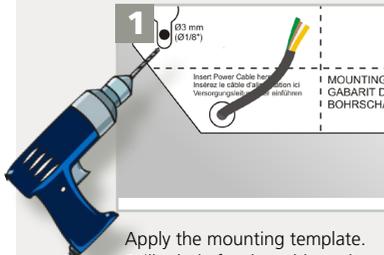

Apply the mounting template.  
Drill 1 hole for the cable and pull it through.  
Drill 2 holes for the screws.


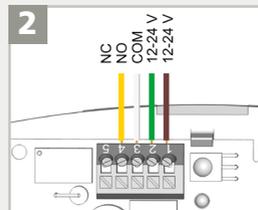


Connect the wires accordingly:  
1 - BROWN - POWER SUPPLY  
2 - GREEN - POWER SUPPLY  
3 - WHITE - COM  
4 - YELLOW - NO  
5 - YELLOW - NC  
or

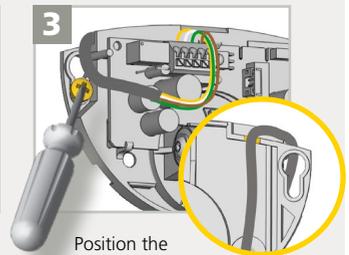

Position the cable as indicated.  
Fix the sensor firmly.

### 3 MECHANICAL ADJUSTMENTS

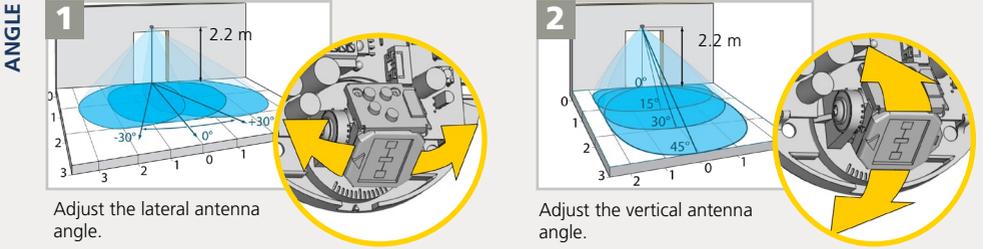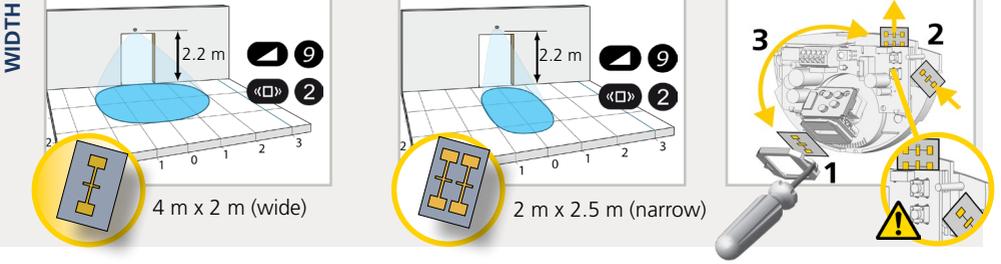


### 4 SETTINGS (by remote control or push buttons)

0 1 2 3 4 5 6 7 8 9

FIELD SIZE		XXS	XS	S	>	>	>	<b>L</b>	XL	XXL	
IMMUNITY FILTER			low	<b>normal</b>	high	>	>	>	>	highest	
DETECTION MODE			bi	<b>uni</b>	uni PRM	uni AWAY	PRM & AWAY	<small>bi = two-way detection; uni = one-way detection towards sensor                      uni PRM = one-way detection also of people with reduced mobility                      uni AWAY = one-way detection away from sensor</small>			
OUTPUT CONFIGURATION			<b>A</b>	P	<small>A = active output (NO-contact)                      P = passive output (NC-contact)</small>						
HOLD-OPEN TIME		<b>0.5 s</b>	1 s	2 s	3 s	4 s	5 s	6 s	7 s	8 s	9 s
MOUNTING HEIGHT			<b>&lt; 3 m</b>	> 3 m							
DOOR CONTROL			<b>auto</b>	open	closed	<small>open = the sensor detects constantly. The LED is ON.                      closed = the sensor is in standby and does not detect. The LED is OFF.</small>					

FACTORY VALUES



## ACCESS CODE

The access code (1 to 4 digits) is recommended to set sensors installed close to each other.

SAVING AN ACCESS CODE:



DELETING AN ACCESS CODE:



Once you have saved an access code, you always need to enter this code to unlock the sensor.

If you forget the access code, **cut and restore the power supply**. During 1 minute, you can access the sensor without introducing any access code.

## TROUBLESHOOTING

PLEASE KEEP FOR FURTHER USE - DESIGNED FOR COLOUR PRINTING

©BEA | Original instructions | 42.7967 / V3 - 07.18

A HALMA COMPANY

	The door remains closed. The LED is OFF.	The sensor power is off.	<b>1</b> Check the wiring and the power supply.
		The door control setting (F2) is set to value 3 (closed).	<b>1</b> Change the door control setting (F2) to value 1 (automatic).
	The door does not react as expected.	Improper output configuration on the sensor.	<b>1</b> Change the output configuration setting on each sensor connected to the door operator.
	The door opens and closes constantly.	The sensor is disturbed by the door motion or vibrations caused by the door motion.	<b>1</b> Make sure the sensor is fixed properly. <b>2</b> Make sure the detection mode is unidirectional. <b>3</b> Increase the antenna angle. <b>4</b> Increase the immunity filter. <b>5</b> Reduce the field size.
	The door opens for no apparent reason.	It rains and the sensor detects the motion of the rain drops.	<b>1</b> Make sure the detection mode is unidirectional. <b>2</b> Increase the immunity filter. <b>3</b> Install the ORA (rain accessory).
		In highly reflective environments, the sensor detects objects outside of its detection field.	<b>1</b> Change the antenna angle. <b>2</b> Decrease the field size. <b>3</b> Increase the immunity filter.
		In airlock vestibules, the sensor detects the movement of the opposite door.	<b>1</b> Change the antenna angle. <b>2</b> Change the antenna. <b>3</b> Increase the immunity filter.
	The LED flashes quickly after unlocking.	The sensor needs an access code to unlock.	<b>1</b> Enter the right access code. <b>2</b> If you forgot the code, cut and restore the power supply to access the sensor without access code. Change or delete the access code.
	The sensor does not respond to the remote control.	Batteries in the remote control are weak or installed improperly.	<b>1</b> Check and change the batteries if necessary.
		Remote control badly pointed.	<b>1</b> Point the remote control towards the sensor.

BEA SA | LIEGE Science Park | ALLÉE DES NOISIETIERS 5 - 4031 ANGLEUR (BELGIUM) | T +32 4 361 65 65 | F +32 4 361 28 58 | INFO@BEA.BE | WWW.BEA-SENSORS.COM



Hereby, BEA declares that the radio equipment type from the EAGLE ONE is in compliance with Directive 2014/53/EU (RED) and Directive 2011/65/EU (RoHS). The full text of the EU declaration of conformity is available on our website.



This product should be disposed of separately from unsorted municipal waste